



PRODUCT BULLETIN

7 X 6 Hammermills

SEPOR, INC.
 718 N. FRIES AVE.
 P. O. BOX 578
 WILMINGTON, CA 90748
 PHONE: 310-830-6601
 FAX: 310-830-9336

Web Site: <http://www.sepor.com>



MODEL 250

Same specifications as 201XL, except for:

- Hopper does not have feed gate to prevent feed throw back
- Sample containers are not furnished
- No open latch sensor is furnished
- Rotor swing hammers and 1/8" perforation and larger screen plates are hardened.
- A starter is not furnished as standard equipment.
- SOUND LEVEL: Empty - 79-82 dBA
- SHIPPING WEIGHT: 250 pounds (114 KG)

MODEL 201XL

- The .40 cubic foot (20 pounds) capacity covered feed hopper has a gate for manual feed control.
- The cast ductile iron crusher housings are hinged and latched for quick access.
- The open latch sensor cuts all power if the stop button has not been actuated. Press the reset button before re-starting the machine.
- The rotor swing hammers and all 3/16 inch thick screen plates are heat treated and hardened.
- Rotor assemblies are reversible (end for end) for maximum hammer life.
- Screen plates all have round hole perforations. Stock perforations are 1/16", 3/32", 1/8", 3/16", 1/4", 3/8" and 1/2" diameters.
- Two containers are furnished - 10 pound (4.5 KG) and 35 pound (16 KG) capacities. They are sealed at the discharge spout while crushing.
- A 2 H.P., T.E.F.C., 230/460 volt, 3 phase, 60 hertz motor and a Nema 12 magnetic starter are furnished. The starter provides overload protection for the motor and a 120 volt control circuit. About 10 feet of four conductor rubber covered cable is provided. Stock wiring is 20 volts, 3 phase, 60 HZ.
- The crusher is mounted on four 2 1/2" diameter casters.
- CAPACITY: 1000 pounds of coal per hour using a screen with 3/16" Dia. perforations; 500 pounds per hour using 1/16" Dia. perforations. Recommended for crushing 2 inch and small material.
- ROTOR SPEED: About 3450 R.P.M.
- POWER REQUIREMENTS: Stock wiring is 230 volts, 3 phase, 60 hertz, 7 amps. Other electrical specifications available including for hazardous locations.
- Shipping Weight: 325 Lbs.

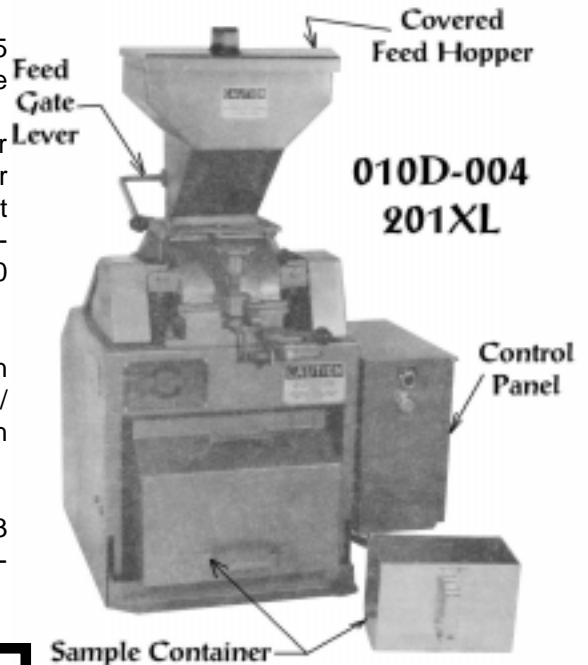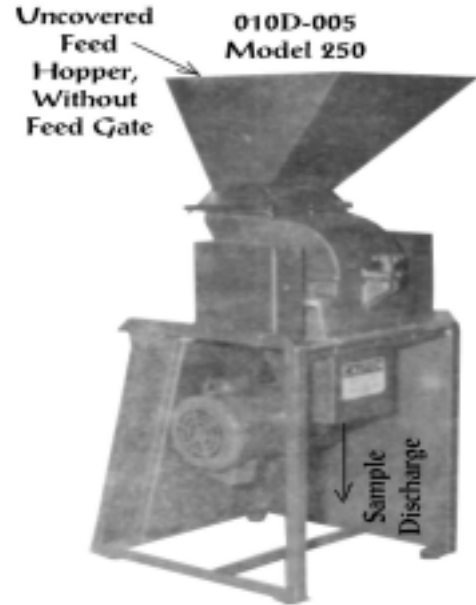

Catalog Number	Description
010D-004	7" x 6" 201 XL Hammermill
010D-005	7" x 6" 250 Hammermill