




SEPOR, INC.
718 N. FRIES AVE.
P. O. BOX 578
WILMINGTON, CA 90748
PHONE: 310-830-6601
FAX: 310-830-9336


PORTABLE DRUM ROTATOR

The portable drum rotators are compact, may be used to mix or agitate the contents of 55 gallon drums (adaptors are available for 5 gallon drums). Either solids or liquids may be mixed in the drums within the weight limitations listed below. Since the drum remains enclosed clean up is minimal, and workers are not exposed to the contents of the drum. By agitating a drum on a drum agitator, build up of sediments are eliminated, important ingredients and mixed and may be poured with the drum contents, the mixture becomes homogenized (important for sampling) and there is no requirement to clean the mixer after mixing - since the drum remains closed during mixing.

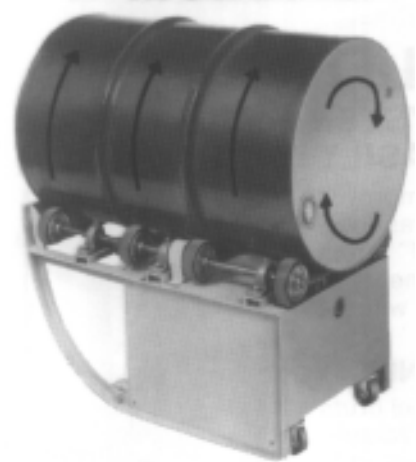

080H-001
Portable Drum Rotator

The Drum Rotator is available in the standard configuration for 55 gallon steel drums (080H-001), with belt supports for rolling fiber drums (080H-004), with a 5 gallon attachment for rolling 5 gallon drums (080H-002), and with a variable drum rotation speed (10-24 RPM's) (080H-003). The maximum steel drum length for the drum rotator is 40", for fiber drums the maximum length is 35". Steel drums in the diameter range of 6" to 28" may be rotated. Fiber drums in the diameter range of 16" to 23" may be rotated.

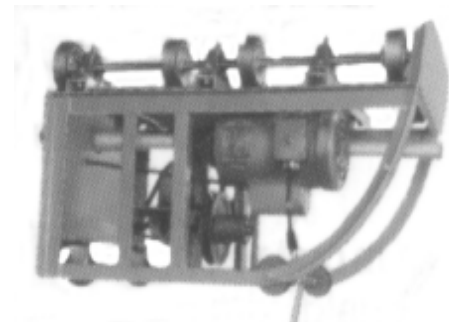

080H-004
Portable Drum Rotator For
Fiber Drums

CATALOG NUMBER	DESCRIPTION	CAPACITY (Lbs)		SHIP WEIGHT
		Liquid	Dry	
080H-001	Drum Rotator 201, 1/2 HP/1 Ph/ 60 Hz, 10 , 20, or 30 RPM Available	500	400	180 Lbs.
080H-003	Variable Speed Drum Rotator, 1/2 HP/1 Ph/60 Hz, 10 - 24 RPM	500	400	180 Lbs.
080H-004	Drum Rotator, 210B, 1/2 HP/1 Ph/ 60 Hz, 10, 20, 30 RPM Available, For Fiber or Steel Drums	300	300	210 Lbs.
080H-002	Five Gallon Drum Attachment, For Rolling 5 gallon drums	N/A	N/A	50 Lbs.

Other Electrical Configurations Are Available, 3 Ph, & 50 Hz