



PRODUCT BULLETIN

SEPOR, INC.
718 N. FRIES AVE.
P. O. BOX 578
WILMINGTON, CA 90748
PHONE: 310-830-6601
FAX: 310-830-9336

Web Site: <http://www.sepor.com>

Low Cost Laboratory Ovens

Low cost, fully equipped, all purpose laboratory ovens for sample drying, baking, annealing, conditioning, sterilizing, evaporating and dehydrating, and other general laboratory work.

STANDARD FEATURES

- Fully factory tested
- Sturdy welded steel construction
- Full length continuous hinge
- Two (2) nickel plated wire shelves
- Shelf supports adjustable in 1/2" increments
- Thermostatically controlled
- Over-temperature protection
- Damper controlled gravity air circulation
- Red pilot light to indicate heater action
- Incoloy sheathed tubular heating element
- Baked enamel exterior finish
- Corrosion resistant galvanized steel interior
- 6 lbs/cf density industrial rockwool insulation
- Mercury thermometer
- On-off switch
- 3-wire cord and plug standard on 120 volt models
- 1 year limited warranty

Model LO-201C

Compact, economical unit with 12" wide x 10" deep x 10" high work space. Temperatures to 200°C (392°F).

Model LR-271C

Used where larger work space and higher temperatures are required. Resilient silicone rubber door gasket. Work space measures 13" wide x 13" deep x 13" high. Temperatures to 270°C (518°F).

Model LW-201C

Largest laboratory oven affording more than twice the capacity of the LO-201C. Work space 18" wide x 12" deep x 16" high. Temperatures to 200°C (392°F).

SPECIFICATIONS NOT FOR USE WITH FLAMMABLE SOLVENTS OR VAPORS. OTHER MODELS AVAILABLE FOR THESE APPLICATIONS

Standard Electrical Characteristics

- 120 volts, 50-60 Hz, 3-wire cord and plug
- 240 volts, 50-60 Hz, 3-wire cord (Can be operated on 208 volts. Heat input will be reduced by 20%.)



Low Cost Laboratory Ovens


Standard Temperature Control Systems

MODELS LO-201C AND LW-201C

Bimetal control thermostat sets desired oven temperature. Thermal cutoff limits maximum oven temperature. Red pilot light indicates heater operation. Top mounted mercury thermometer.

MODEL LR271C

Primary hydraulic control thermostat sets desired oven temperature. Second manual reset hydraulic thermostat limits maximum oven temperature. Red pilot light indicates heater operation. Top mounted mercury thermometer.

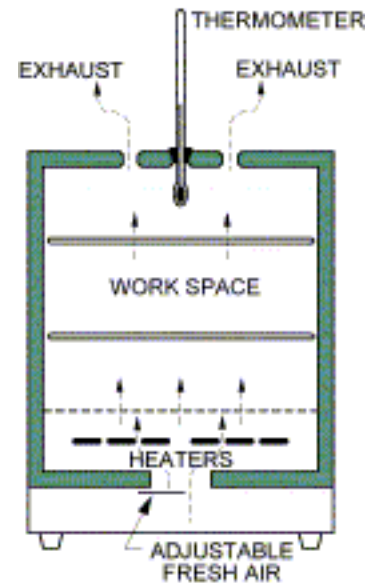

Gravity Convection

ALL MODELS

Heat is transferred from the bottom up through the oven chamber by natural convection and exits through vents in the oven top. Adjustable fresh air inlet damper at the oven bottom provides control of the amount of fresh air entering the oven

Model	Work Space Dimensions (WxDxH)	Volume Cu Ft	Outside Dimensions (WxDxH)	Max Temp	Number of Shelves*	Insulation	Watts	Approx Shipping Weight
LO-201C	12" x 10" x 10"	0.7	14" x 12" x 19"	200°C	2	1"	800	39 lbs
LR-271C	13" x 13" x 13"	1.3	17" x 17 3/8" x 24"	270°C	2	2"	800	66 lbs
LW-201C	18" x 12" x 16"	2	20" x 14" x 25"	200°C	2	1"	1600	66 lbs