



PRODUCT BULLETIN

SEPOR, INC.
 718 N. FRIES AVE.
 P. O. BOX 578
 WILMINGTON, CA 90748
 PHONE: 310-830-6601
 FAX: 310-830-9336

Web Site: <http://www.sepor.com>

MODEL LT 25 CENTRIFUGAL PUMP

CENTRIFUGAL PUMPS

Flows to 12 GPM
 Heads to 48 Feet

MATERIALS OF CONSTRUCTION

316SS (LT25SS)


APPLICATIONS

- Vapor Degreasers
- Chillers
- Filter Systems
- Wafer Treatment Systems
- Wafer
- Solvents
- Various Industrial Chemicals
- Freon
- Alkaline Solutions
- Deionized Wafer



FEATURES

- SIZE: 1/4" x 1/2" x 3"
- Compact, close coupled design.
- MOTORS:
- NEMA 42C Face
- 1/4 HP, 1800 RPM. 1/60, TEFC
- 1/3 HP, 3600 RPM, 1/60, DP
- 1/3 HP, 3600 RPM. 1/50/60, TEFC
- 1/3 HP, 3600 RPM, 3/50/60, TEFC
- S.S. is all investment cast.
- Impeller castings are investment cast for accuracy & improved efficiency.
- Mechanical Seal: Type 21 Viton Carbon vs. Ceramic standard.
- T.9 Teflon, T.21 Double Seals. Silicon Carbide Faces are among the many seal options available from stock. Seal flush and other options available.
- 316 Stainless Steel replaceable stub shaft

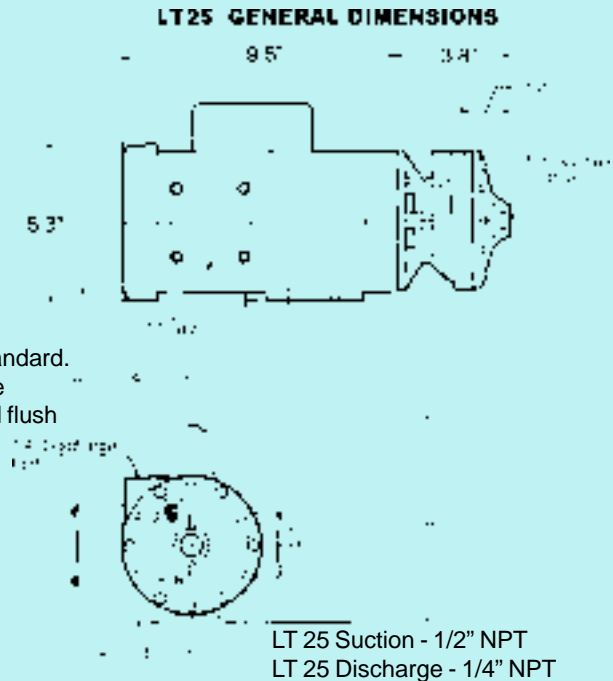

ALSO AVAILABLE

- VERTICAL MOTOR PUMP
- FRAME MOUNTED
- WITH AIR MOTOR DRIVE

Catalog Number	Description	Ship Weight
030A-240	Model LT 25 Pump, 1/3 Hp, 110 or 220 V/1 Ph/50-60 Hz	100 lbs.



Signature

Phone: 310-530-6601

CURVE NUMBER: 62700068 MODEL: LT25 SIZE: 1/4x1/2x3 RPM: 3450
 IMPELLER DIA: Various MIN. IMPELLER DIA: 2.25" MAX. IMPELLER DIA: 3.94" MAX. SOLIDS: .10"
 CUSTOMER: Sepor CUSTOMER'S P.O. _____
 REMARKS: 1/12/99

