



PRODUCT BULLETIN

SEPOR, INC.
 718 N. FRIES AVE.
 P. O. BOX 578
 WILMINGTON, CA 90748
 PHONE: 310-830-6601
 FAX: 310-830-9336

Web Site: <http://www.sepor.com>

Peristaltic Pump

1 to 130 Gallons Per 24 Hours Capacity

The AV-100 combines all the terrific features of the A 100 series, like the Superior Head and Pump Tube Assemblies, and Attractive all Plastic Enclosure (housing), with an all ball bearing VARIABLE SPEED MOTOR. The motor is adjusted by means of an all Solid State Controller. The operator simply increases or decreases motor speed to achieve the desired feed rate.


Consider the AV-100 for your next application requiring a Superior Variable Speed Peristaltic Injector.

The FLEXFLO AV 1600 is particularly well suited for OEM applications. It has a basic design that not only makes it economical, changing the pump tube is the only regular maintenance required. The standard unit features the exclusive FLEXFLO head and pump tube assemblies, and the compact housing of the C-600P.

The AV 1600 has a fixed feed rate with a number of RPM from which to choose. A variety of modifications are possible, including a percentage controller.



AV-100						
MODEL NUMBER	MAX. GPD	RATE Ml/MN	PUMP TUBE O.O.	FEED LINE O.O.	MAX. PSI	
AV-114-4	8	21	1/4"	1/4"	25	
AV-130-4	18	49	1/4"	1/4"	25	
AV-1 14-6	29	76	3/8"	3/8"	25	
AV-114-7	38	102	7/16"	3/8"	25	
AV-130-6	61	162	3/8"	3/8"	25	
AV-130-7	88	232	7/16"	3/8"	25	
AV1457	138	365	7/16"	3/8"	25	

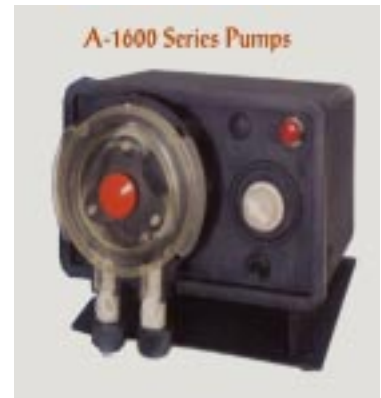

A-1600 MODEL NUMBER	MAX. GPD	RATE Ml/MN	PUMP TUBE O.D.	FEED LINE O.D.	MAX. PSI
A-1614-3N	1.0	3	3/16"	1/4"	25
A-1630-3N	4.0	12	3/16"	1/4"	25
A-1645-3N	5.0	15	3/16"	1/4"	25
A-1614-4	6.0	17	1/4"	1/4"	25
A-1630-4	15.0	40	1/4"	1/4"	25
A-1614-6	22.0	60	3/8"	3/8"	25
A-1614-7	28.0	75	7/16"	3/8"	25
A-1630-6	49.0	130	3/8"	3/8"	25
A-1645-6	74.0	195	3/8"	3/8"	25
A-1645-7	112.0	295	7/16"	3/8"	25