




UD Pulverizer Direct Drive

SEPOR, INC.
718 N. FRIES AVE.
P. O. BOX 578
WILMINGTON, CA 90748
PHONE: 310-830-6601
FAX: 310-830-9336

- * Rugged Construction
- * Offers efficiency, simplicity of operation and maintenance.
- * Will reduce samples of 1/4" or smaller to 150-200 mesh, depending upon material.
- * Adjusting screw with lock lever to hold permanent setting of plates.




UD PULVERIZER WITH COVER OPEN

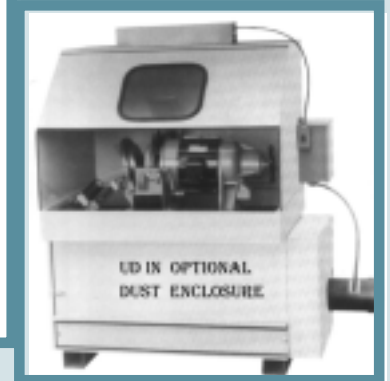

**UD PULVERIZER
WITH DUST
ENCLOSURE**

The UD Disc Plate Pulverizers will efficiently reduce 1/4" material to -150 mesh at rates ranging from 50 to 200 lbs./hour. The UD Pulverizer is direct driven and operates at 900 RPM. The 5 horsepower UD operates at 1,000 RPM and has the greatest capacity. They are furnished with a set of standard iron alloy grinding plates (255 Brinell Hardness) and in a variety of motor configurations to meet most demanding laboratory applications. Other grinding plates are available in materials such as Low Phosphorous Carbon Steel, Manganese Steel, Chrome Alloy and Alumina Ceramic. Thermal relays are supplied for 220 volt operation, unless otherwise specified. The UD Pulverizer only occupies 6 square feet of area.

UD WITH OPTIONAL DOOR OPENER

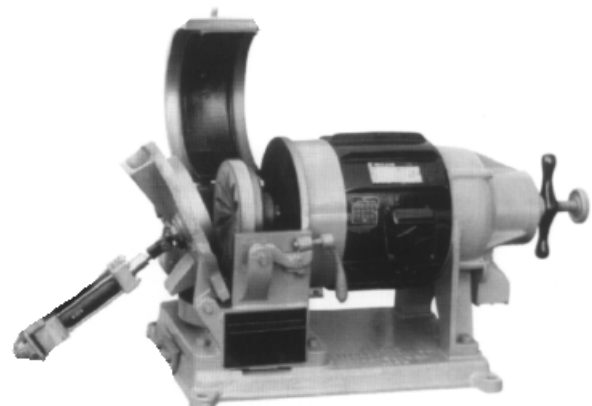

CATALOG NUMBER	DESCRIPTION	CAPACITY (LBS./HR.)	DIMENSIONS (INCHES)	SHIP WEIGHT (LBS.)
010F-004	2 HP/220 V/3 Ph/60 Hz or 380 V/3/50 Hz	100-150	44 X 16 X 18(H)	415
010F-005	3 HP 220 V/3 Ph/60 Hz or 380 V/3/50 Hz	100-200	44 X 16 X 18(H)	440
010F-006	5 HP/220 V/3 Ph/60 Hz or 380 V/3/50 Hz	100-200	44 X 16 X 18(H)	455