



## PRODUCT BULLETIN


SEPOR, INC.  
 718 N. FRIES AVE.  
 P. O. BOX 578  
 WILMINGTON, CA 90748  
 PHONE: 310-830-6601  
 FAX: 310-830-9336

Web Site: <http://www.sepor.com>

# Hammermill, 10 X 15 For -6 Inch Feed


- The covered feed hopper has a capacity of 1.6 cubic feet (70 pounds) and a manual feed control gate.
- The cast ductile iron crusher housings are hinged and latched for quick access.
- The open latch sensor cuts all power. Press the reset button before re-starting the machine, if the stop button has not been actuated.
- The rotor swing hammers and all 3/16" thick screen plates are heat treated and hardened.
- Rotor assemblies are reversible (end for end) for maximum hammer life.
- All screen plates have round hole perforations. Stock perforations are 1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 3/4" and 1" diameters.
- The 1.5 cubic feet capacity container will hold about 70 pounds of coal. It is sealed to the discharge spout while crushing.
- A7½ H.P., T.E.F.C., 230/460volt, 3 phase, 60 hertz motor and Nema 12 magnetic starter are furnished. The starter provides a 120 volt control circuit and overload protection for the motor. About 10 feet of four conductor, rubber covered cable is furnished to connect to your power source.
- The crusher is mounted on four 4" diameter casters.
- CAPACITY: 4000 pounds per hour using a 3/8" Dia. perforated. screen plate; 2500 pounds using a 3/16" Dia. screen. Recommended for crushing 6 Inch and smaller material to minus 4 mesh.
- ROTOR SPEED: 1260 R.P.M. interchange "V" pulleys - 2360 R.P.M.
- POWER REQUIREMENTS: Stock wiring is 230 volts, 3 phase, 60 hertz, 21 amps. Machine can be equipped for other electrical specifications and for hazardous locations.
- SOUND LEVEL: Empty - 75-77 dBA
- SHIPPING WEIGHT: 840 pounds (380 KG)

10 X 15 Hammermill

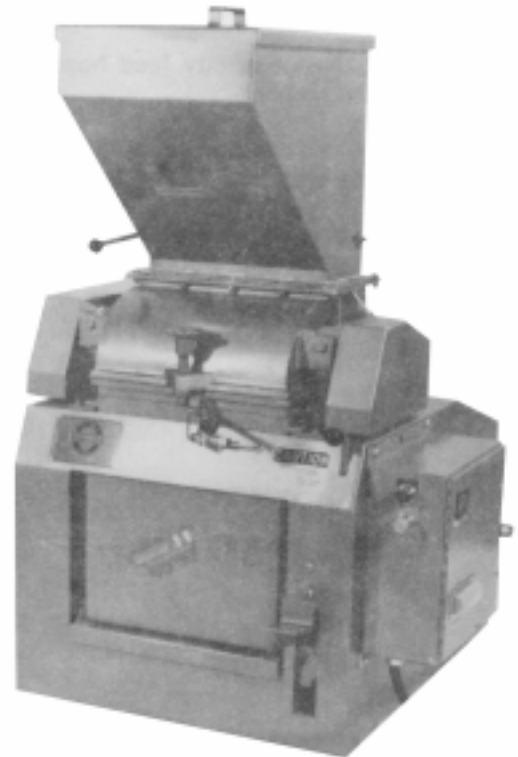

401 XL Hammermill  
 36" Wide x 39.5" Deep x 56" High

Catalog Number	Description
010D-002	401 XL, 7.5 HP 3 Ph/230-460 V/60 Hz
010D-003	451, Economy Model, 5 Hp 3 Ph/230-460 V/60 Hz, Does not have the following items that are on the 401 XL: motor starter, overload, cable, crusher enclosure, casters, throw back plate.

TITLE		
HAMMERMILL PARTS LIST GENERAL DIMENSIONS MDL 450		
SCALE	DATE	
NA	1998	
DRAWN BY		
ACAD		
 SEPOR, INC. 718 N FRIES AVE. WILMINGTON, CA 90748 310-830-6601 FAX 310-830-9336		

