




PRODUCT BULLETIN

SEPOR, INC.
718 N. FRIES AVE.
P. O. BOX 578
WILMINGTON, CA 90748
PHONE: 310-830-6601
FAX: 310-830-9336

Web Site: <http://www.sepor.com>

Model 4230 Jaw Crusher **Feed Opening 16" X 12"**

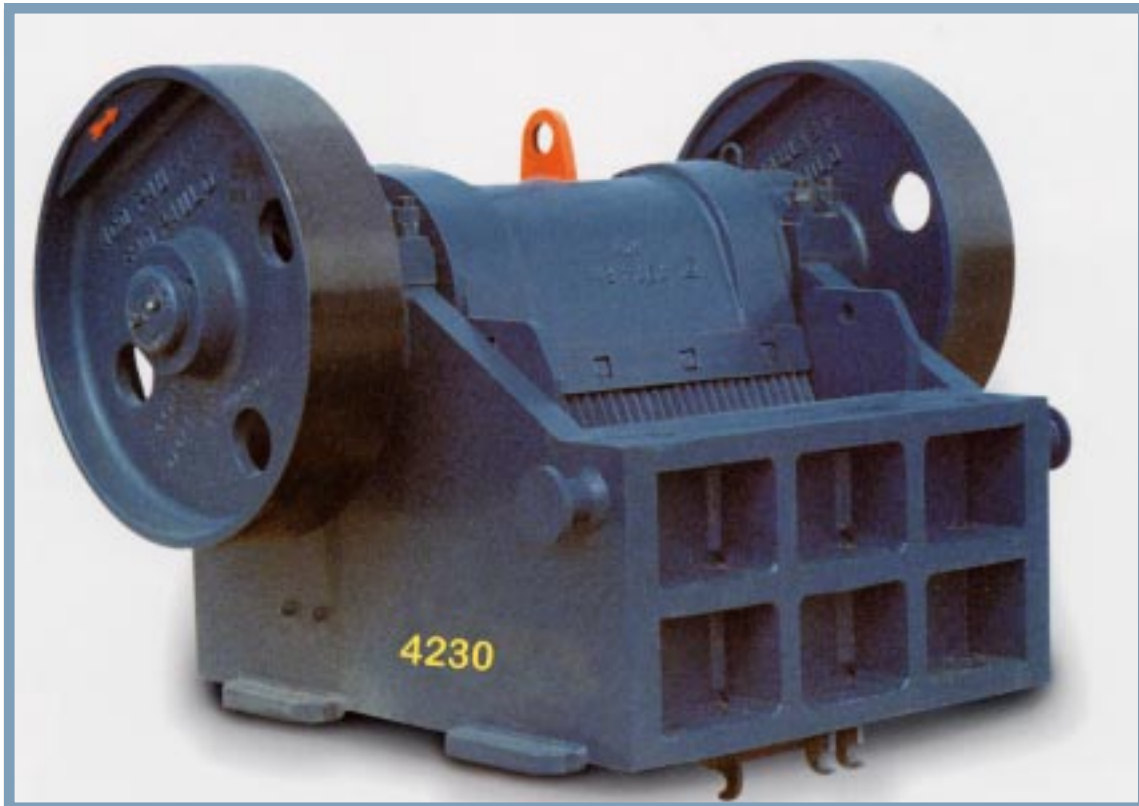

THESE JAW CRUSHERS ARE DESIGNED FOR PRODUCTION, AND COMBINE HIGH SPEED AND THROW WITH A DEEP CRUSHING CHAMBER. THE MOST ADEQUATE NIP ANGLE ENSURES A FASTER FLOW OF THE CRUSHED MATERIAL. THESE CRUSHERS WILL HANDLE THE HARDEST ROCKS, MAINTAINING THEIR PERFORMANCE WITH MINIMUM MAINTENANCE REQUIREMENTS UNDER SEVERE OPERATING CONDITIONS. BEARINGS HAVE LONG LIFE AND ARE SELF ALIGNED ROLLER BEARINGS. THE LOW STRESS SWING JAW IS CONSTRUCTED OF CAST CARBON STEEL, AND THE RIGID FRAME IS A ONE PIECE WELDED STEEL ASSEMBLY.

WEAR PARTS ARE EASILY REPLACED, JAW ADJUSTMENTS ARE EASILY MADE, AND BEARING LIFE HAS BEEN INCREASED WITH GREASE LUBRICATION AND LABYRINTH TYPE SEALS.

CAPACITIES OF THE MODEL 4230, WITH -9" FEED AND 3/4" PRODUCT IS 11-14 TONS PER HOUR. WITH -9" FEED AND 2" PRODUCT, CAPACITIES INCREASE TO 19-24 TONS PER HOUR. THE CLOSED SIDE SETTING MAY BE ADJUSTED BETWEEN 3/4" AND 3". MAXIMUM FEED SIZE IS ABOUT 10". APPROXIMATELY 75% OF THE PRODUCT FROM THIS JAW CRUSHER WILL BE EQUAL TO OR FINER THAN THE CLOSED SIDE SETTING ON THE JAWS.